

Benefits

- **Monitoring:** 24Hr monitoring is provided with all our systems and for the life of the system. No subscription fees apply.
- **Warranty:** Transparent warranty based on throughput of the batteries, meaning that the number of cycles doesn't affect warranty.
- **Increased Savings:** Inverter can be programmed to take advantage of night rate electricity and used to increase savings.
- **Powercut:** Essential Services System, allowing some essential services to run in times of a powercut.
- **Durability:** IP 65 Rated Products
- **Recycling:** All our cells can be fully recycled at the end of their lifetime as we use LiFePO4 Technology (Lithium Ion Phosphate) and not harmful Cobalt.



Unit D2 Northcity Business Park,
Finglas,
Dublin 11

(T) 01-8643838
(F) 01-8644925
(E) info@lvprenewables.ie
(W) www.lvprenewables.ie

GivEnergy



Hybrid Systems

Home Hybrid Inverter

- Compatible with GivEnergy LiFePO4 battery packs
- Essential Services possible in times of powercut
- Installed to new builds or retrofit to an existing solar PV system
- IP65 water-resistant for exterior install
- Remote software updating via WiFi / 3G dongle
- Cloud based monitoring and control through web / app interface
- Batteries are able to charge directly from Solar PV and the Grid
- Available in 3.6kW & 5.0kW models

Dimensions (W/H/D) 480*440*260mm
Weight 24kg

Input Data (DC)	Giv-HY3.6	Giv-HY5.0
Max DC power	4500W	6500W
Max DC voltage	600V	
Start voltage	100V	
DC nominal voltage	360V	
PV voltage range	100V - 600V	
MPPT voltage range	120V - 550V	
Max input current per string of tracker A / tracker B	11A/11A	
Number of indepent MPPT Input	2	
Feedback current to the array	OA	

Output Data (AC)	Giv-HY3.6	Giv-HY5.0
Nominal AC output power	3680W	5000W
Max AC apparent power	3680VA	5000VA
Max output current	220V/230V/240V;180Vac-280Vac	
AC nominal voltage; range	50,,60Hz;+/-5Hz	
Power factor at rated power	1	
Power factor	0.9leading...0.9laggaing	
THDi	<3%	
AC connection	Single phase(can be linked for three phase)	

Battery	Giv-HY3.6	Giv-HY5.0
Battery type		LiFePO4
Nominal Power		2500W
Nominal vpltage		51.2V
Battery capacity		>50Ah
Max discharging/charging power	2500W/2500W	
Charging curve	3-stage adaptive with maintenance	
Operation voltage range	46-57V	
Max charging/discharging current	50A / 50A	

Emergency Backup Power Output	Giv-HY3.6	Giv-HY5.0
Output rated power	97.00%	97.10%
Output voltage	96.50%	96.50%
Maxmium efficiency	99.50%	99.50%


Efficiency	Giv-HY3.6	Giv-HY5.0
Euro-ETA		3000VA
MPPT efficieny	230Vac +/-2%, 50Hz (60Hz Optional) +/-0.2%, THDV <3% (linear load)	



- Using the latest LiFePO4 prismatic cell technology
- Warrented thoughput of 10MWh per 1kWh of stored capacity Or 10 Years. Whichever comes first
- 0.5C-1C charge and discharge rate
- 170Wh per Kg +/- 5%
- Plug & Play functionality
- Dual BMS systems allowing greater control and functionality
- Fully Recyclable at end of life
- IP65

Model	Giv-Bat2.6	Giv-Bat6.3	Giv-Bat8.2
Capacity	2.6 kWh	6.3kWh	8.2kWh
Voltage	51.2Vdc	51.2Vdc	51.2Vdc
Current	51Ah	123Ah	162Ah
IP Grade	IP65	IP65	IP65
BMS	Robust multi point mointoring BMS pre installed		
Life cycling (80% DOD, 25° C)	10 years		
Operation temperature	-20°C ~ 55°C		
Storage Temperature	-30°C ~ 60°C		
Warranty BTT	26MWh	63MWh	84MWh
		10 years, whichever comes sooner	
Standard		UN 38.3, IEC61000	
Physical	28kg 380*340*191mm	53kg 690*390*182 mm	84MWh 480*550*220 mm

Electrical Parameters	Giv-Bat2.6	Giv-Bat6.3	Giv-Bat8.2
Operation voltage	46.4 ~ 57.9Vdc		
Maximum Charging Voltage	57Vdc		
Maximum Charging / Discharging current	60A / 60A		
Network Interface	RS485		
Communication Protocols	Modbus		
Advantages	Stackable, BMS upgradable, *IP65		

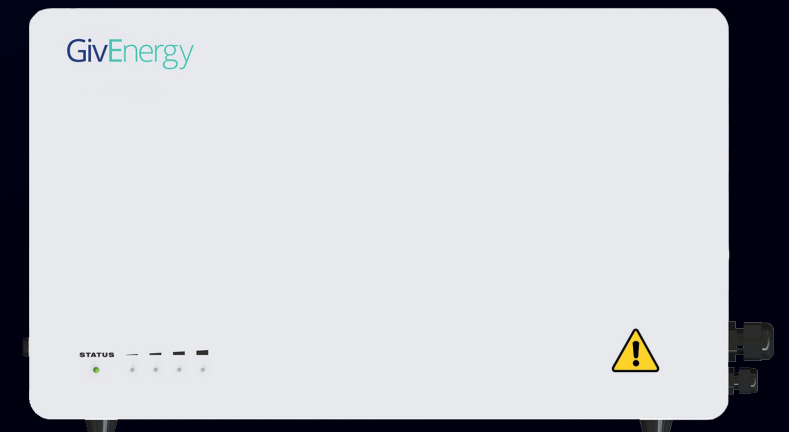

Battery Storage

LiFePO₄